# FabWright Inc. Commercial Disposers

### 2 HP Medium Frame

#### **APPLICATION**

Hotels and hospitals, medium to large-size restaurants and cafeterias, steak and seafood restaurants and supermarkets where volume is moderate to heavy.

Seating capacity:

250

Meals per day:

1,290

Solid waste per hour:

950 lbs.

#### **SPECIFICATIONS**

Model #2006-1P or Model #2006-3P with 6" opening; continuous feed 2 HP dual voltage motor in SINGLE phase 115/230 volts, 1725 RPM, 60 Hz., 26/13.0 amps. and THREE phase 208/230/460 volts, 1725 rpm, 60 Hz., 6.0/5.6/2.8 amps; 4 GPM; 100 lbs. shipping weight; manual reset overload protection in motor; permanently lubricated ball bearings.

# RECOMMENDED ACCESSORIES

- Minimum 1/2" Solenoid valve
- Minimum 1/2" Syphon breaker
- · Sink adaptor
- · Dejamming wrench
- Model 620-SN NEMA 4 approved Control Panel

See price list for additional accessories. Available in 50 Hz.




## **Commercial Food Waste Disposers**

Model #2006-1P Model #2006-3P

A NOTE TO SPECIFIERS: That you may be assured of receiving the high quality you expect when you specify a commercial food waste disposer, we include the following sample specification for your convenience.


"Food waste disposer shall be a FabWright Inc. Model #2006-1P. 2 HP. 115/230 volts, single phase, 60 Hz" or "Model #2006-3P, 2 HP, 208/230/460 volts, three phase, 60 Hz."



Model #2006 - 1P / 3P

Model #	2006-1P		2006-3P	
Α	6"	152.4mm	6"	152.4mm
В	8 1/4"	209.6mm	8 1/4"	209.6mm
C	4"	101.6mm	4"	101.6mm
D	10 1/2"	266.7mm	10 1/2"	266.7mm
E	2"	50.8mm	2"	50.8mm
F	24 3/4"	628.7mm	24 3/4"	628.7mm
G	8 1/8"	206.4mm	8 1/8"	206.4mm

Specifications subject to change without notice. Unit should be installed in accordance with local codes and FabWright Inc.'s printed installation instructions.

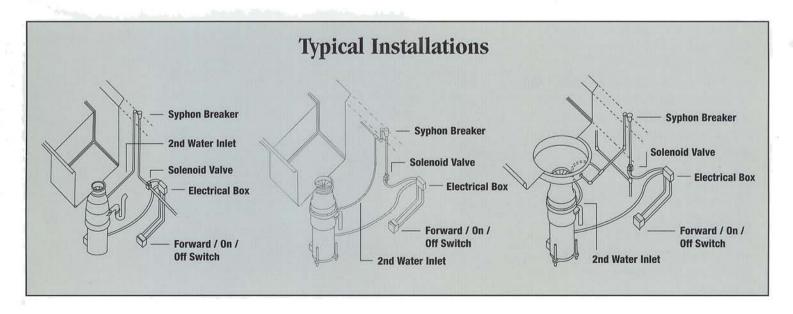





## FabWright

13912 Enterprise Drive - Garden Grove, CA 92843

Ph: (714)554-5544 or (800)854-6464 Fx: (714)554-5545