

FabWright Inc. Commercial Disposers

5 HP Medium Frame

APPLICATION

Hotels and hospitals, medium to large-size restaurants and cafeterias, steak and seafood restaurants and supermarkets where volume is moderate to heavy.

Seating capacity:	1,000
Meals per day:	2,670
Solid waste per hour:	1,500 lbs.

SPECIFICATIONS

Model #5006-1P or Model #5006-3P with 6" opening; continuous feed 5 HP dual voltage motor in SINGLE phase 208/230 volts, 1725 RPM, 60 Hz., 25.5/24.0 amps. and THREE phase 208/230/460 volts, 1725 rpm, 60 Hz., 14.8/14.0/7.0 amps; 7 GPM; 105 lbs. shipping weight; manual reset overload protection in motor; permanently lubricated ball bearings.

RECOMMENDED ACCESSORIES

- Minimum 1/2" Solenoid valve
- Minimum 1/2" Syphon breaker
- Sink adaptor
- Dejamming wrench
- Model 620-SN NEMA 4 approved Control Panel

See price list for additional accessories.
Available in 50 Hz.



Exclusive 1/2" second water inlet provides "after flush" of grinding chamber




WARRANTED FOR 1 YEAR PARTS AND ON-SITE SERVICE

Commercial Food Waste Disposers

Model #5006-1P Model #5006-3P

A NOTE TO SPECIFIERS: That you may be assured of receiving the high quality you expect when you specify a commercial food waste disposer, we include the following sample specification for your convenience.

"Food waste disposer shall be a FabWright Inc. Model #5006-1P, 5 HP, 208/230 volts, single phase, 60 Hz" *or*
 "Model #5006-3P, 5 HP, 208/230/460 volts, three phase, 60 Hz."

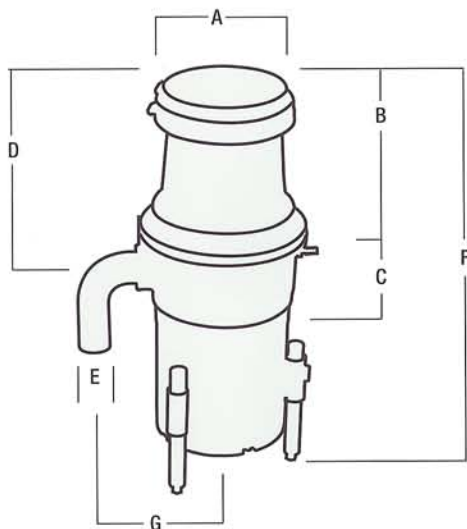


Model #5006 - 1P / 3P

Specifications				
Model #	5006-1P		5006-3P	
A	6"	152.4mm	6"	152.4mm
B	8 1/4"	209.6mm	8 1/4"	209.6mm
C	4"	101.6mm	4"	101.6mm
D	10 1/2"	266.7mm	10 1/2"	266.7mm
E	2"	50.8mm	2"	50.8mm
F	26 1/4"	666.8mm	26 1/4"	666.8mm
G	8 1/8"	206.4mm	8 1/8"	206.4mm

Specifications subject to change without notice. Unit should be installed in accordance with local codes and FabWright Inc.'s printed installation instructions.

Typical Installations

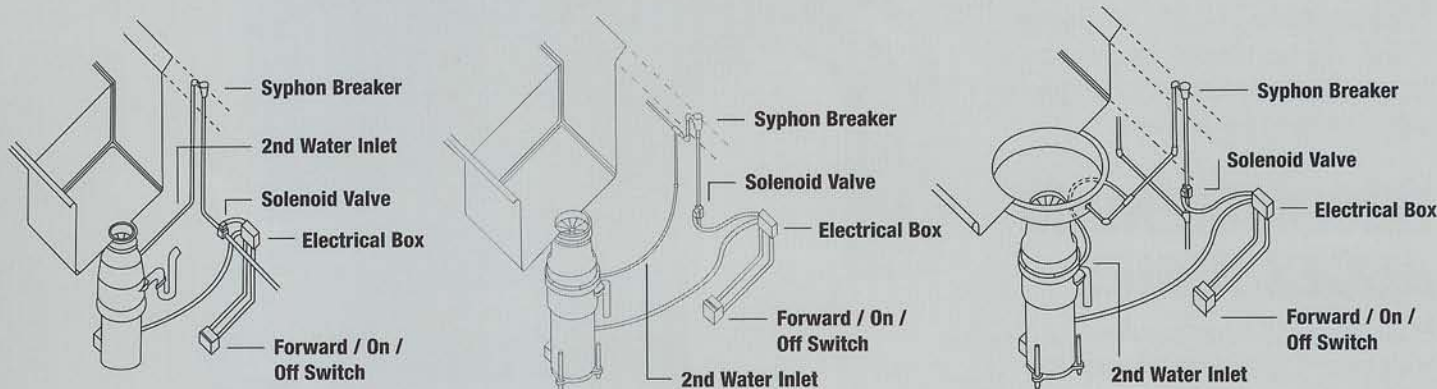

FabWright

13912 Enterprise Drive - Garden Grove, CA 92843

Ph: (714)554-5544 or (800)854-6464 Fx: (714)554-5545