FabWright Inc.

Commercial Disposers

1 HP Small Frame

APPLICATION

Small to medium-size restaurants, school and hospital cafeterias, churches, fast food operations, ship-board galleys, short-order cafes and coffee shops where volume is light to moderate.

Seating capacity:

100

Meals per day:

735

Solid waste per hour:

660 lbs.

SPECIFICATIONS

Model #1006-1P or Model #1006-3P with 6" opening; continuous feed 1 HP dual voltage motor in SINGLE phase 115/230 volts, 1725 RPM, 60 Hz., 12.4/6.2 amps., in THREE phase 208/230/460 volts, 1725 RPM, 60 Hz., 3.6 3.4/1.7 amps; 2.5 GPM; 55 lbs. shipping weight; manual reset overload protection in motor; permanently lubricated ball bearings.

RECOMMENDED ACCESSORIES

- 1/2" Solenoid valve
- 1/2" Syphon breaker
- · Sink adaptor
- · Sink stopper
- · Dejamming wrench
- On / off / reverse switch

See price list for additional accessories. Second water inlet optional for small-frame disposers. Available in 50 Hz.




Commercial Food Waste Disposers

Model #1006-1P Model #1006-3P


A NOTE TO SPECIFIERS: That you may be assured of receiving the high quality you expect when you specify a commercial food waste disposer, we include the following sample specification for your convenience.

"Food waste disposer shall be a FabWright Inc. Model #1006-1P, 1 HP, 115/230 volts, single phase, 60 Hz" or "Model #1006-3P, 1 HP, 208/230/460 volts, three phase, 60 Hz."



Model #	1006-1P		1006-3P	
model #			-	24024
Α	6"	152.4mm	6"	152.4mm
В	6"	152.4mm	6"	152.4mm
C	4 1/2"	114.3mm	4 1/2"	114.3mm
D	8 7/8"	225.4mm	8 7/8"	225.4mm
E	1 1/2"	38.1mm	1 1/2"	38.1mm
F	22 1/4"	565.1mm	22 1/4"	565.1mm
G	6 1/8"	155.6mm	6 1/8"	155.6mm

Specifications subject to change without notice. Unit should be installed in accordance with local codes and FabWright Inc.'s printed installation instructions.

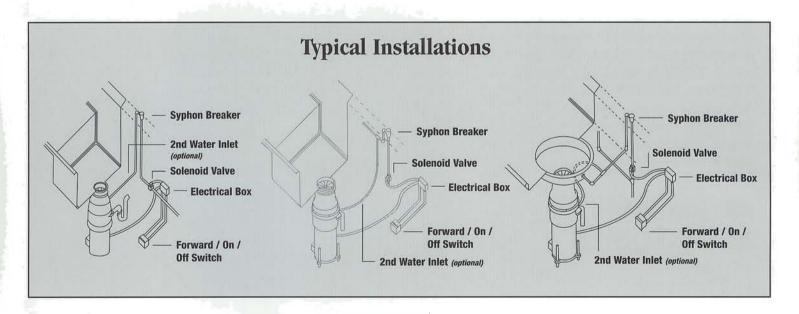





FabWright

13912 Enterprise Drive - Garden Grove, CA 92843

Ph: (714)554-5544 or (800)854-6464 Fx: (714)554-5545